
TGS 3870 - for the detection of both Methane and Carbon Monoxide

Features:

- * **Miniature size and low power consumption**
- * **High sensitivity and selectivity to both methane and carbon monoxide (CO)**
- * **Low sensitivity to alcohol vapor**
- * **Long life and low cost**



Applications:

- * **Combination methane and carbon monoxide Detectors**

TGS 3870 is Figaro's new metal oxide semiconductor gas sensor for the detection of both methane and carbon monoxide. Using a micro-bead gas sensing structure, both methane and carbon monoxide can be detected with a single sensor element by periodic application of two different heater voltages (high and low). Miniaturization of the gas

sensing bead results in a heater power consumption of only 38mW (average).


TGS 3870 has low sensitivity to alcohol vapors (a typical interference gas in the residential environment) and has high durability, making the sensor ideal for consumer market gas alarms.

The figure below represents typical sensitivity characteristics, all data having been gathered at standard test conditions (see reverse side of this sheet). The Y-axis is indicated as sensor resistance ratio (R_s/R_o) which is defined as follows:


R_s = Sensor resistance in displayed gases at
various concentrations

R_o = Sensor resistance in 100ppm of CO

Sensitivity Characteristics (methane):

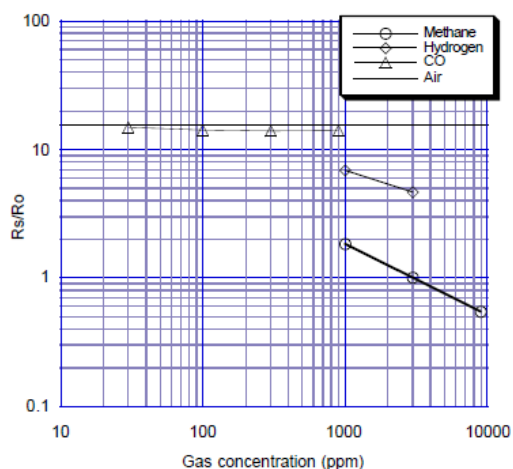


Sensitivity Characteristics (CO):

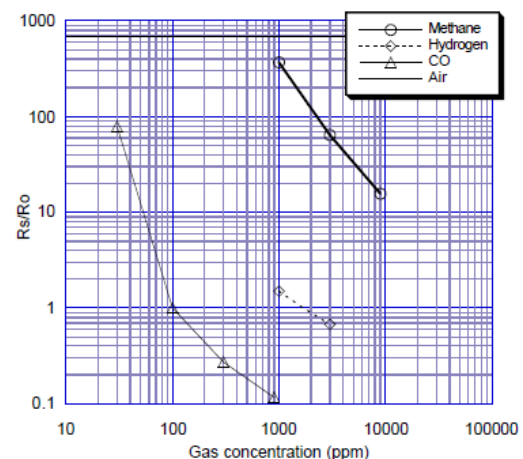

Basic Measuring Circuit:

The sensor requires two voltage inputs: heater voltage (V_H) and circuit voltage (V_C). The sensor has three pins: Pin #3--heater (+), Pin #2--sensor electrode (+), and Pin #1--common (-). To maintain the sensing element at specific temperatures which are optimal for sensing two different gases, heater voltages of 0.9V and 0.2V are alternately applied between pins #1 and #3 during a 20 second heating cycle. Circuit voltage (V_C) is applied between both ends of the sensor (R_S) and a load resistor (R_L), which are connected in series, to allow measurement of voltage (V_{RS}). Circuit voltage (V_C) should be applied only at the moment when the signal is taken from the sensor. Please refer to the document "Technical Information for TGS3870" for details regarding the timing and application of V_C and V_H . **Caution:** Do not apply a constant circuit voltage (5.0V) or the sensor would not exhibit its specified characteristics.

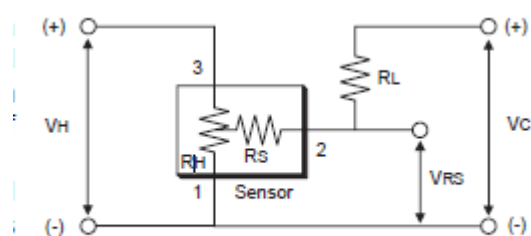


Basic measuring circuit

Specifications:

Model number			TGS 3870	
Sensing element type			Micro-bead	
Standard package			Plastic base and metal can	
Target gases			Methane and Carbon Monoxide	
Typical detection range			Methane - 500~12500 ppm Carbon monoxide - 50~1000ppm	
Standard circuit conditions	Heater Voltage	V _H	V _{HH} = 0.9V±3%, 5 sec. V _{HL} = 0.2V±3%, 15 sec.	
	Circuit voltage	V _C	5.0±0.2V DC pulse <i>(refer to Technical Information for TGS3870)</i>	
	Load resistance	R _L	Variable (>0.75kΩ)	
Electrical characteristics under standard test conditions	Heater resistance	R _H	3±0.3Ω at room temp.	
	Heater power consumption	P _H	120mW	V _{HH} = 0.9V DC
			11mW	V _{HL} = 0.2V DC
			38mW	average
	Sensor resistance	R _S	0.35~3.5kΩ in 3000ppm methane	
			1.8~24kΩ in 150ppm CO	
	Sensitivity (Change ratio of R _S)	β	0.50~0.65	$\frac{R_S \text{ CH}_4 \text{ 3000ppm}}{R_S \text{ CH}_4 \text{ 1000ppm}}$
			0.1~0.6	$\frac{R_S \text{ CO 300ppm}}{R_S \text{ CO 150ppm}}$
Standard test conditions	Test gas conditions		Target gas in air at 20±2°C, 65±5%RH	
	Circuit conditions		V _{HH} = 0.9V±2%V, 5 sec. V _{HL} = 0.2V±2%V, 15 sec. V _C = 5.0±0.02V DC pulse <i>(refer to Technical Information for TGS3870)</i>	
	Conditioning period before test		≥5 days	

Structure and Dimensions:

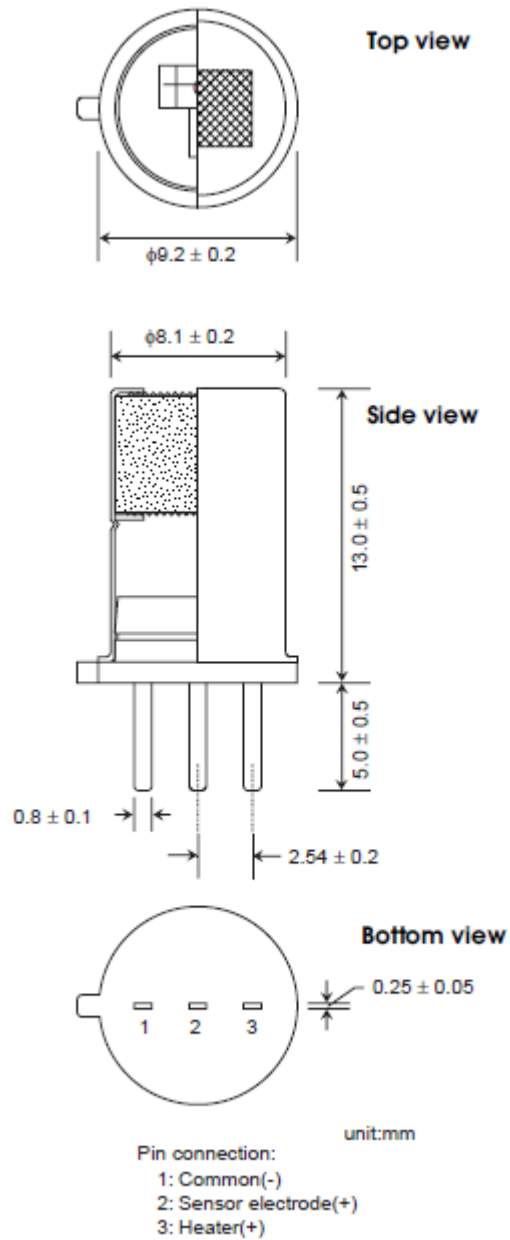

The value of power dissipation (PS) can be calculated by utilizing the

following formula:

$$P_s = \frac{(V_{RS})^2}{R_s}$$

Sensor resistance (Rs) is calculated with a measured value of VRS by

using the following formula:

$$R_s = \frac{(V_{RS} - 0.5V_H)}{(V_C - V_{RS})} \times R_L$$

TINKYLE